



NOVEMBER 2007

VERSADOCK STOCK ACCESSORIES

DESCRIPTION



CL-01 Standard Mooring Cleat

Aluminium

Spacers may be required to elevate cleat, if the base of the cleat does not sit on lug 4.



AC-01 Anchor / mooring ring

Galvanised Steel

The ring can be placed in any orientation, and is secured through the Lug Connector using a washer and Nut.




IBF-01 Versadock Fender

Includes Pin & Sliding Nut

Flush with Surface level

Fender sits on top of **lug 4**, or equivalent spacer and the pin passes through to the nut on the bottom lug

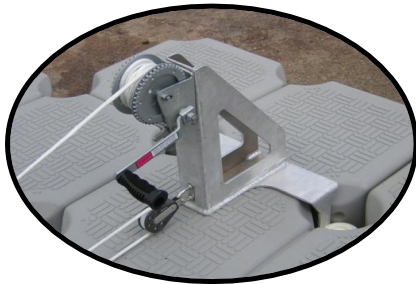

WA-01 Aluminium Winch Assembly

Positioned one float in from the front of the dock
Do not overtighten



BW-01 Back Winch System

Position rings at approximately the steering position on the boat. Pass the line through each ring, and connect the ends securely, forming a continuous loop.



**FS-01 Versadock Float Step Ladder
Aluminium, Stays out of water**

Place connecting pins through the Aluminium fitting, and locate the forks in the ELC. Wind down the pins.